



BIG CLEM Bulk Abrasive Blast Machines

CLEMCO

- ◆ **Safety**
- ◆ **Reliable Performance**
- ◆ **High Productivity**

Clemco Big Clem multi-outlet, bulk abrasive blast machines are rugged, reliable, and efficient. Designed for large jobs, where multiple blast operators are needed, the Big Clem offers the convenience of a large supply of abrasive, loaded at one time, ensuring more blast on time, and saving the time and labor of refilling smaller machines.

Big Clems are available in three standard sizes: 60, 120, and 160 cubic feet abrasive capacity and, depending upon the model, for up to four blast operators. Units are rated 125 psi working pressure with 150 psi offered as an option. Each model is available as stationary, yard towable, or highway towable to suit the application.

Each operator station is fitted with Auto-Quantum (pneumatic or electric) pressure-hold remote controls, which allow each operator to start and stop independent of the others. The Quantum is an all-media valve, making it possible to switch between expendable mineral or slag abrasives to steel grit as necessary. Pneumatic remote controls are best when the blast hose is 100 feet or shorter; beyond 100 feet electric remotes are recommended to minimize the response time at the nozzle for beginning or stopping blasting.




Standard Features:

- ◆ *Fail-to-safe, normally-closed, all-media Auto Quantum abrasive metering valve that is easy to operate and requires little maintenance.*
- ◆ *Flexible pusher lines simplify valve maintenance.*
- ◆ *Media shut-off valves allow servicing individual metering valves leaving others operational.*
- ◆ *Automatic pop-up filling valve, with debris screen, and swing-open rain cap—the safest option on the market—eliminates the potential for injury possible on units with camlock closures.*
- ◆ *Large 12-inch x 16-inch man-way permits access to pressure vessel chamber for maintenance service.*
- ◆ *Dual detachable ladders to access pop-up valve for machine filling.*
- ◆ *Lifting eyes capable of holding fully-loaded machine.*
- ◆ *Abrasive cut-off feature on the remote controls to allow work surface blow-off.*
- ◆ *Large, built-in 1600 CFM moisture separator/manifold helps to reduce moisture, a naturally-occurring by-product of compressed air. Supports up to four #8 nozzles.*
- ◆ *Electric remote option includes weather-proof control panel and anti-freeze injector capability.*
- ◆ *Stationary models for fixed installation are ideal for industrial applications. Optional off-shore model with full-load lifting eyes and integral base for super-sack frame.*
- ◆ *Yard-towable models offer increased flexibility for moving the unit about on site; and highway-towable models are the most versatile offering the convenience of loading the machine and delivering it ready to go to the job site.*



Quantum Metering Valve

- ◆ Unrestricted abrasive flow through metering valve.
- ◆ Metering takes place upstream—not at the plunger—eliminating direct exposure to media. Does not require urethane or tungsten inserts.
- ◆ Normally-closed design requires compressed air to open.
- ◆ 45-degree abrasive feed assures constant, uniform abrasive flow.

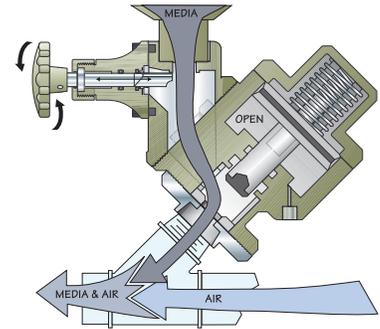

Big Clems are Safe, Reliable and Efficient

- ◆ Automatic pop-up valve eases refill and cannot be opened while machine is under pressure.
- ◆ 2:1 semi-elliptical head provides more abrasive storage for maximum abrasive capacity.
- ◆ Integral moisture separator and air manifold designed to eliminate restrictions that cause air-flow loss, while providing equal, moisture-free air to each operator.



Durable Transport System

- ◆ Big Clems are well-balanced with well-distributed tongue weight. Leaf springs and axles provide strength beyond load capacity.
- ◆ Towable models feature rugged trailer assembly for negotiating rough terrain. Wheels and tires rated for easily handling load at highway speed.
- ◆ Highway models equipped with four-wheel electric brakes, emergency breakaway switch, and high-visibility tail lights, brake lights, and turn signals.

Description	Stationary Stock No.	Yard Portable Stock No.	Highway Towable Stock No.
60 cuft (3 ton cap., 48" dia.)			
w/pneu. remotes	05100	05101	05102
w/12V elec. remotes	10815	10816	10817
Weight	2,400 lbs.	2,600 lbs.	3,000 lbs.
120 cuft (6 ton cap., 60" dia.)			
w/pneu. remotes	05103	05104	05105
w/12V elec. remotes	10818	10819	10820
Weight	3,000 lbs.	3,200 lbs.	3,500 lbs.
160 cuft (8 ton cap., 72" dia.)			
w/pneu. remotes	05106	05107	05108
w/12V elec. remotes	10821	10822	10823
Weight	4,000 lbs.	4,250 lbs.	4,500 lbs.

Distributed by:

ISO 9001:2000 certified. Clemco is committed to continuous product improvement. Specifications are subject to change without notice.

© 2009 Clemco Industries Corp. • One Cable Car Drive • Washington, MO 63090 • Phone (636) 239-4300 • Fax (636) 239-0788

Stock No. 09310

Job No. 0201-0379 • Date of Issue: 06/98 Rev. D: 02/09