



DOSATRON®

WATER POWERED DOSING TECHNOLOGY

3 GPM: D07RE5

Product Specifications


Call 800-523-8499 to order the Dosatron for your specific application

Dilution Range:	1:128 to 1:18 (.8% to 5.5%)
Water Flow Range:	.02 to 3 GPM
Operating Pressure Range:	4.3 to 85 PSI
Available Housing Materials:	<ul style="list-style-type: none"> • Polypropylene (Standard Blue) • PVDF (White)
Dimensions:	10" x 4 1/2"
Weight:	2 lbs
Connection Size:	3/4" NPT
Maximum Temperature:	104° F
Included Accessories:	6 ft clear suction tube, strainer, weight, mounting bracket and operating manual
Recommended Accessories:	200 mesh filter, check valve, pressure regulator, flow restrictor.



Recommended Installation

IPK34 - 3 GPM Industrial Plumbing Kit

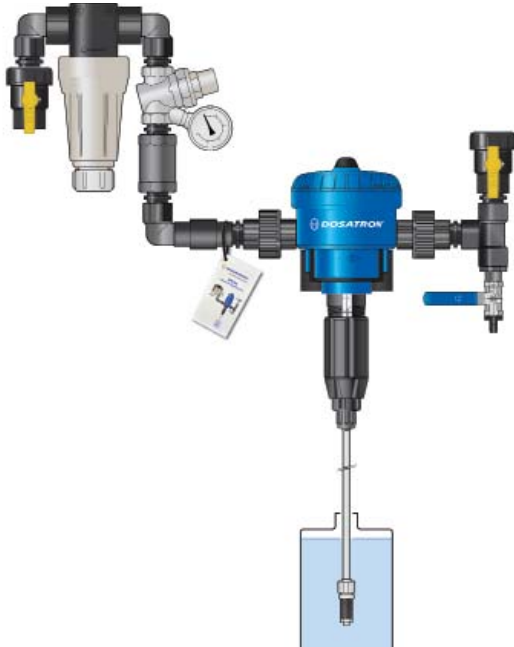

- 3/4" polypropylene Banjo single union ball valve
- 1/2" stainless steel ball valve
- 3/4" polypropylene 200 mesh tee filter
- 3/4" brass pressure regulator w/gauge
- 3/4" 3 GPM flow restrictor
- 3/4" polypropylene check valve
- 3/4" union schedule 80 PVC
- 3/4" x 2" Banjo polypropylene fittings
- 1/2" x 2" Banjo polypropylene fittings
- 1/2" x 1/2" Banjo barb fitting
- 3/4" male to 1/2" female Banjo reducer bushing
- 3/4" Banjo T
- 3/4" Banjo street elbows
- Roll of Teflon tape
- Instruction card
- Zip tie



Dosatron International
2090 Sunnydale Blvd. • Clearwater, FL, USA
800-523-8499 • www.dosatronusa.com

Dosatron International, Inc. is an industry leader in water-powered, proportional chemical injectors. Dosatron products are manufactured according to ISO 9001:2000 and ISO 14001:2004 standards.