

Microblast®

TECHNICAL DATA SHEET

- Ceramic beads with high recyclability & impact resistance.
- Aesthetical finishing of satinised & smooth surfaces.
- Engraving & ultrafine treatment.

TYPICAL CHEMICAL ANALYSIS

ZrO ₂	60 to 70 %
SiO ₂	28 to 33 %
Al ₂ O ₃	< 10 %

Chemical analysis carried out by X-Ray fluorescence on melting sample

CRYSTAL STRUCTURE

Zirconia	68 %
Vitreous phase	32 %

Typical values


PHYSICAL PROPERTIES

Specific gravity	3.8 g/cm ³
Bulk density	d>2.10 kg/l

* Statistical measurement

- White color, spherical and smooth surface
- Homogeneous and productive treatment
- High toughness, but gentle with equipment and tools
- Chemically inert, non contaminating for treated parts
- Low dust production

DESIGNATION AND AVAILABLE SIZES

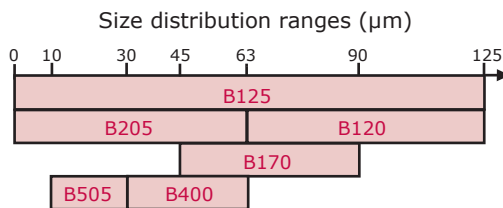


SAFETY DATA SHEET _____ DS MS BE 13

PACKAGING

20 & 25 kg jerrycan

500 kg or 1 ton big-bag

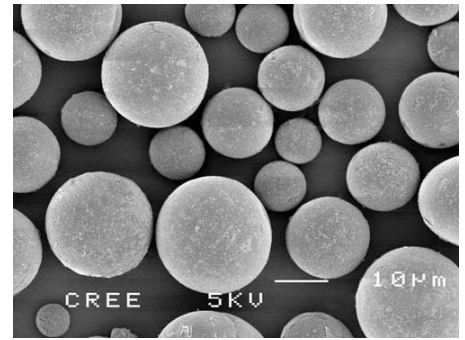

MAIN APPLICATIONS

- Smooth & aesthetical finishing
- Surface etching
- Weld cleaning
- Deburring
- Glass frosting
- Fine engraving

Saint-Gobain ZirPro is the expert in zirconia-based materials for industrial applications. From our global network of manufacturing, commercial and research facilities, we serve leading customers through long-term and trust-based relationships.

SEPR Saint-Gobain ZirPro
B.P. 60025 - 84131 Le Pontet Cedex
France

Tel.: +33 (0)4 90 32 70 71
Fax: +33 (0)4 90 32 70 61
e-mail: zirpro@saint-gobain.com

<http://www.zirpro.com>