


PRS Blast & Recovery Systems

Reduce Operating Costs & Improve Finishes

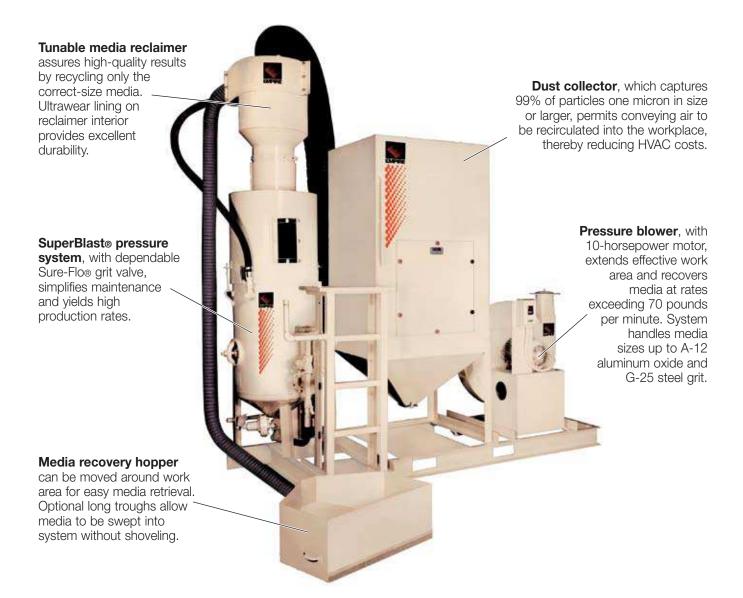

Using "economical" blast media, such as slag, for industrial blasting can be very costly indeed. Because these low-cost abrasives break down so quickly, reusing them is impractical. As a result, you're constantly paying for replacement media, disposal of spent media, and manhours to move this material around—all of which can put a big drain on your profits.

With Empire's pneumatic Blast & Recovery System (PRS), you can tap the cost-saving advantages of more durable media for only a modest investment. Empire's PRS lets you move up to recyclable media, such as aluminum oxide, chilled iron and steel grit, which can be used effectively over and over—from 6 to 200 times. The result is usually a very attractive return on investment in media savings alone.

Reusable media are also faster acting and less dusty, meaning you get the additional advantages of increased productivity and a cleaner working environment. With the PRS, you can move blasting operations into enclosures to comply with increasingly stringent environmental regulations. And, because the PRS recycles good media while removing dust and fines, blasting results are more consistent.

Simple blast controls and convenient media-loading procedures make Empire's PRS very easy to operate. A built-in access ladder and viewing window in the system's storage hopper are just two examples of the PRS's many friendly features. And, with heavy-duty duct, an Ultrawear-lined reclaimer, and a silicone carbide nozzle, you know the system is designed to last.

PRS Flyer


OPTIONS

- Fan silencer
- · Automatic bag shaker
- Vibrating reclaimer screen 8', 10', and 12' sweep-in
- Operator safety equipment recovery troughs
- Multiple operators
- Electric remote controls
- Various electricals
- Magnetic particle separator
- Room ventilation dust collectors
- SuperBlast® portable options and upgrades
- · Large, free-standing, mediastorage hoppers

Optional media-recovery trough is installed flush with the floor to enable sweep-in loading of recyclable media. *Self-metering*, anti-clogging design permits large amounts of media to be loaded into the system without operator attention.


SURE-FLO® GRIT VALVE

Patented Automatic Sure-Flo® valve is easily adjustable and assures precise media regulation as well as uninterrupted flow.



The Sure-Flo valve has excellent wear characteristics and, once worn, can be repaired more quickly and easily than any other grit valve on the market.

PLAN VIEW

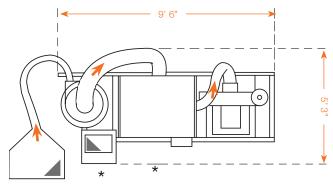

- Access areas are noted by asterisks (*) in plan view.
- Arrows within drawing indicate direction of flow.
- Total system height is a nominal 12 feet.

Silica sand is not to be used in any **Empire blast equipment.**

BEST WARRANTY IN THE INDUSTRY Three years limited on parts and labor.

Information subject to change without notice.

SYSTEM SPECIFICATIONS

| Part No. | Blast System |
|----------|--|
| 245006 | Mounts to 650 pot |
| 245007 | Mounts to 650 pot, includes CDC collector |
| 247106 | Includes SuperBlast 650 pot |
| 247107 | Includes SuperBlast 650 pot & CDC collector |
| 245010 | Mounts to 1050 pot |
| 245011 | Mounts to 1050 pot, includes CDC collector |
| 247110 | Includes 1050 SuperBlast pot |
| 247111 | Includes 1050 SuperBlast pot & CDC collector |
| | 245006 245007 247106 247107 245010 245011 247110 |

Skid chassis is standard.

All models available with optional dolly chassis for mobility.

Media Recovery Hopper

- 11-gauge, welded-steel construction
- Anti-clogging refuse screen
- 30" wide x 30" deep x 12" high

Media Conveying Duct

• 4" ID x 25' long—Heavy-duty construction

Media Reclaimer

- Rugged, 12-gauge, welded-steel construction
- Ultrawear lining with externally replaceable wearplate
- Tunable to various media sizes
- 800 CFM ventilation

Media Storage Hopper

- 11-gauge, welded-steel construction
- Viewing window
- Capacity: 6.5 ft³ with PRS-6 models; 10.5 ft³ with PRS-10 models
- Nominal diameter: 24" on PRS-6 models; 30" on PRS-10 models

Pressure Vessel ("S" models)

- SuperBlast 650 or 1050, ASME construction
- 780 remote controls with automatic Sure-Flo® grit valve*
- 1-1/4" piping
- Capacity: 6.5 ft3 with PRS-6 models; 10.5 ft3 with PRS-10 models
- Moisture separator/filter and choke feature

Blast Apparatus ("S" models)

- 5/16", silicone-carbide, venturi nozzle
- 1"-ID x 50'-long, heavy-duty blast hose with couplings
- Saf-Stop II™ pneumatic blast-control handle† (OSHA)
- 55' dual-line pneumatic control hose

Dust Collector/DCM-200 HV (High Vacuum)

- 14-gauge, welded-steel, reinforced construction
- 200 ft2 filtration with 30 cotton-sateen bags
- Large access door; raised clean-out door
- Push-button, pneumatic cleaning

Pressure Blower

- 10 hp, 3450 RPM, 800 CFM (at 42" static pressure H₂O)
- 440-480 V, 60 Hz, fused disconnect

- Heavy-channel iron, welded and reinforced
- Access ladder with hand holds
- Cut-outs for forklift transport
- Heavy-duty rubber casters on "D" and "SD" models
- * Patent No. 4,518,145

† Patent No. 3,834,082

OTHER EMPIRE PRODUCTS

- Blast Rooms
- Portable Blasters
- Automated Blast Systems
- Blast Cabinets—economy to custom



2101 West Cabot Boulevard, Langhorne, PA 19047-1893 CALL: (215) 752-8800 E-MAIL: Airblast@empire-airblast.com FAX: (215) 752-9373 VISIT: www.empire-airblast.com